



- Plug & Work
- Easy and intuitive operation
- Compact design
- Versatility



X-TREME PRO e-commerce

X-TREME PRO e-commerce

Ideal for companies working in the packaging and e-commerce packaging sector for the application of one or two double-sided adhesive tapes + tear tapes at the same time to allow closing/opening/reclosing.

X-TREME Pro e-commerce can apply double-sided adhesive tape to die-cut stretched or corrugated cardboard packaging with a maximum width of 1600mm and a maximum thickness of 15mm.


X-TREME Pro e-commerce lets you install up to 2 applicators of your choice between 60 and 100mm + an additional 4 applicators (30, 60 or 100mm), which are individually controlled on a touchscreen to allow for greater flexibility in each process.



The patented applicator applies 2 strips of double-sided adhesive + tear tape (via a motorised unwinder) in a single step with a maximum application speed of 50m/min.

X-TREME Pro e-commerce software allows you to save parameters for up to 100 different jobs. It is operated exclusively by electric current with no need for compressed air.

This "standard" X-TREME machine version requires installation and training by our specialised personnel. We ship worldwide!

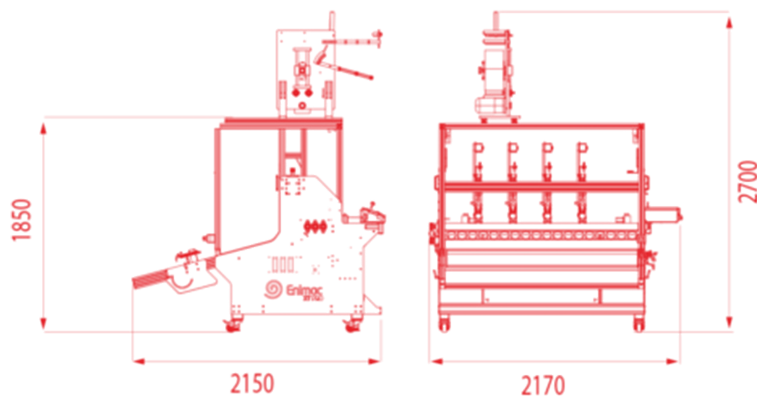

Characteristics X-TREME Pro e-commerce

Maximum width of workable product	1600mm
Maximum thickness of workable product	15mm
Minimum applicable tape length	7mm (5m/min)
Maximum applicable tape length	3m (optional over 3m)
Maximum number of consecutive tape strips („spots”) applicable	8
Minimum distance between consecutive tape strips	7mm (5m/min)
Minimum distance between parallel tape strips (with 2 applicators side by side)	66mm
Layout	complete mobile unit
Speed	minimum 5m/min - maximum: 80m/min
Maximum number of installed applicators	6
Usable tape size	minimum 4mm - maximum 100mm
Standard applicator	30mm
Number of memorizable jobs	maximum 100
Optional applicator	60/100mm
Setup time	less than 5 minutes
Power supply	110/230 V -50/60 Hz
Maximum power consumption	0,75 Kw
Machine dimensions	height 2700mm width 2170mm depth 2150mm

Unwinder characteristics

Type of applications	e-commerce boxes, envelopes, cardboard boxes
Template	DJFL6-VI
Maximum tape width	160mm
Maximum outer diameter of tape roller	400mm
Minimum internal diameter of tape roller	155mm
Tape roller height	160mm
Maximum application speed	120m/min.
Power	400W
Weight	30kg
Dimensions	height 818 mm width 871 mm depth 371 mm

X-TREME PRO e-commerce APPLICATORS


XT-PRO e-commerce can be mounted with different head types from 30mm to a maximum of 100mm, offering for some of these the option of using from 1 to 3 different tape types on a single head to meet even the most complex application needs.




APPLICATION TEMPLATES

Our standard machines already offer a wide range of applications for flat and thin formats commonly used in the paper industry: posters, envelopes, pocket folders,

packaging, etc., but also in any sector requiring single or double-sided adhesive tape on different flat surfaces up to a maximum thickness of 10mm or 15mm.

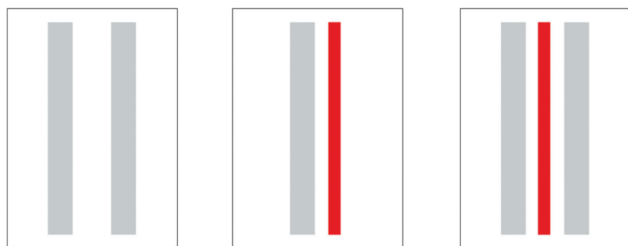


Examples of double-sided tape applications on curved surfaces with different spots

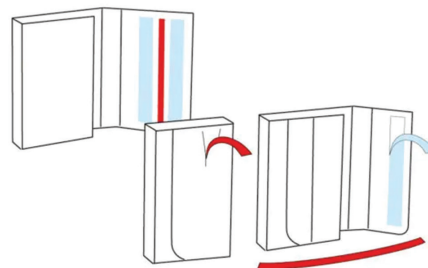


Examples of double-sided tape applications on curved surfaces with different spots


APPLICABLE TAPES

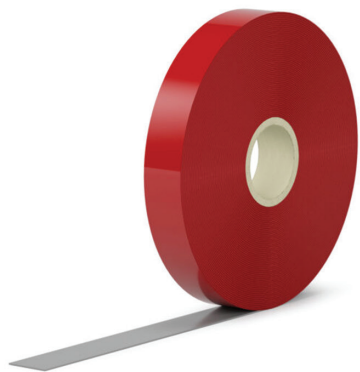


Double-sided foam
tapes

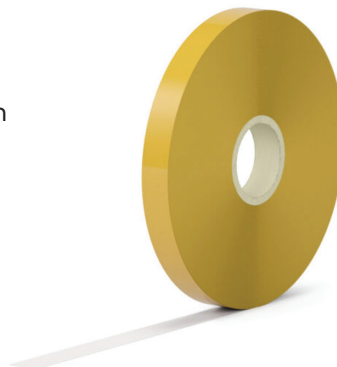


TNT/PET/PPL
thin double-sided
adhesive tapes

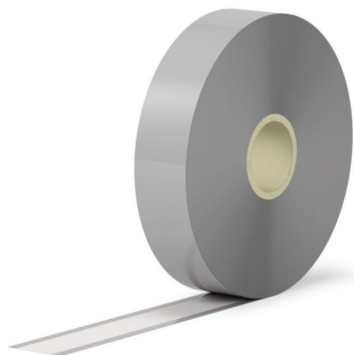

Spoiled
tapes

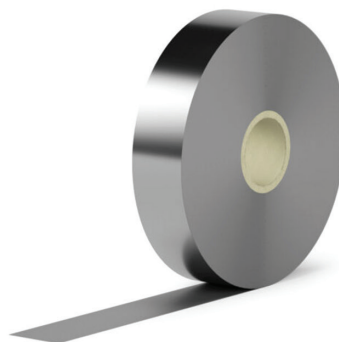

Single-sided
adhesive tapes

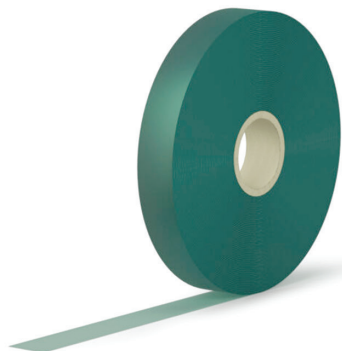


Masking
tapes

FUNCTIONALITY




Double magnetic feed guides
for sheet feed alignment

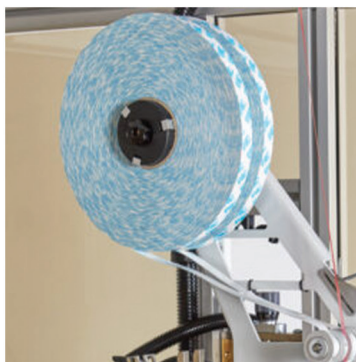

Split spindle for applying two
rolls of tape on the same
applicator





Online support service

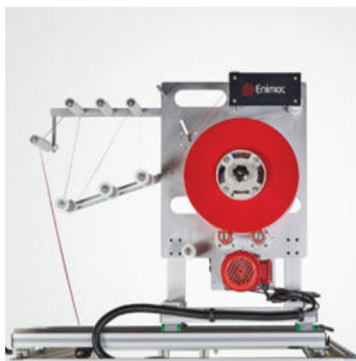

Tape spool unwinder for tear
tape and other tapes in spool
form

GALERIA

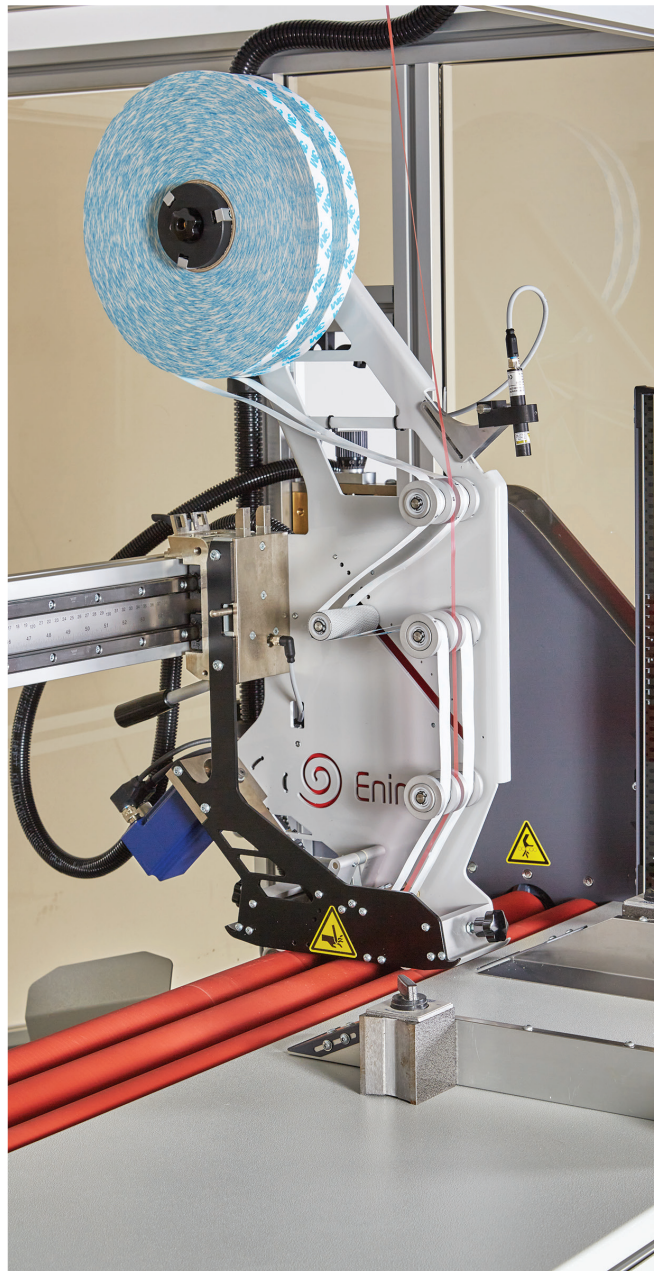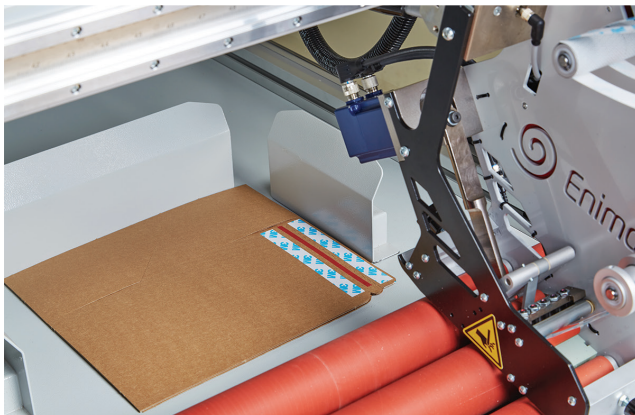

Tape Application Made Easy



**EKO-TECH Spółka z ograniczoną
odpowiedzialnością spółka komandytowa**

ul. Fabryczna 1B, 42-660 Kalety

tel: 34 3578 624

fax: 34 3527 595

e-mail: info@eko-tech.biz

www.eko-tech.biz | www.converting-tasm.pl