


31120

Textile tape

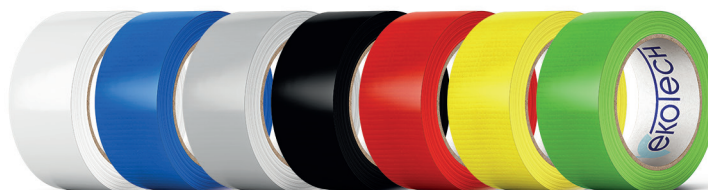

TECHNICAL DATA

Carrier:	LDPE film + polyester fabric
Adhesive:	Synthetic rubber (Hotmelt)
Fabric density (mesh)	26
Total thickness (µm)	220
Adhesion to steel (N/25mm)	28
Pr	3
Tensile strength (N/25mm):	105
Temperature resistance (°C):	-10°C to +75°C
Color(s):	Gray, black, white, yellow, red, green, blue. Other colors available upon request.
Surface texture:	smooth and rough
Usuwalna bez pozostawiania śladów:	no
Moisture resistant:	yes
Can be torn by hand:	yes
Testing standards:	ASTM, PSTC
Storage::	up to 12 months in dry, dust-free rooms at room temperature

THE PRODUCT COMPLIES WITH EU STANDARDS 2002/95/EC (ROHS) AND 2006/122/EC (PFOS) AND DOES NOT CONTAIN ANY VDA-LISTED SUBSTANCES

All the information given in the above specification was developed under the QMS quality system. They contain product and application information, but do not constitute an assurance of properties. The above information does not relieve you of the obligation to conduct a test under the conditions of application at your company. The product exhibits property tolerances due to the manufacturing process. The values given are an averaging of test results. Assurance of properties in the legal sense is not related to the above data. Technical changes reserved.

The quoted adhesive strength refers to laboratory tests according to specific test standards. In no way does it imply a guarantee of any parameter with respect to other materials and bonding conditions than those specified in the test standard. In addition, due to tolerances occurring in the manufacturing process, the actual adhesive strength of the product may show some deviation from the values stated in the technical documentation.