


42420

Double – sided polypropylene tape

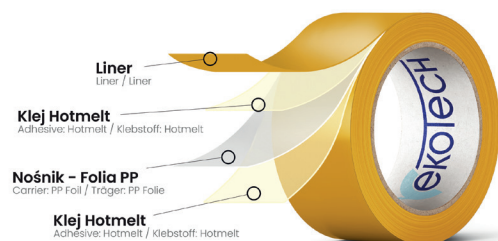

TECHNICAL DATA

Carrier:	Polypropylene film (PP)
Colour:	Transparent
Adhesive:	Synthetic rubber, Hotmelt
Liner:	Yellow paper
Thickness of carrier:	0.028mm
Total thickness:	0.18mm
Adhesive force:	>40N / 25mm
Tearing force:	100N / 25mm
Stretchability:	140%
Length / Width:	50m and special / 6 - 150mm and special
Temperature resistance:	-30°C to +60°C (short-term up to +80°C)
Application temperature:	+10°C (recommended +15°C)
Test method:	AFERA, DIN
Storage:	up to 12 months in dry and dust-free rooms at room temperature

THE PRODUCT COMPLIES WITH EU STANDARDS 2002/95/EG (ROHS) AND 2006/122/EG (PFOS) AND DOES NOT CONTAIN ANY VDA-LISTED SUBSTANCES



All the information given in the above specification was developed under the QMS quality system. They contain product and application information, but do not constitute an assurance of properties. The above information does not relieve you of the obligation to conduct a test under the conditions of application at your company. The product exhibits property tolerances due to the manufacturing process. The values given are an averaging of test results. Assurance of properties in the legal sense is not related to the above data. Technical changes reserved.

The quoted adhesive strength refers to laboratory tests according to specific test standards. In no way does it imply a guarantee of any parameter with respect to other materials and bonding conditions than those specified in the test standard. In addition, due to tolerances occurring in the manufacturing process, the actual adhesive strength of the product may show some deviation from the values stated in the technical documentation.

